


UL Listed Foam Branches




UL Listed Foam Branches

FB-225-F

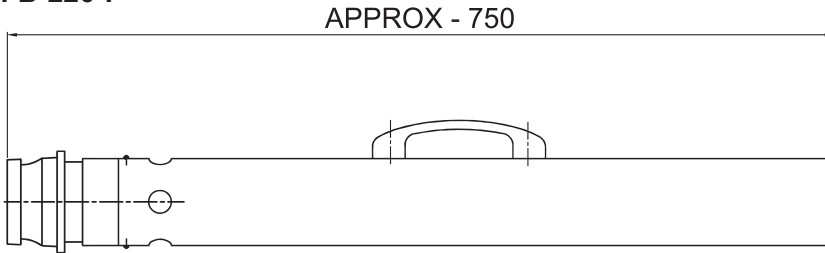

FB-450-F

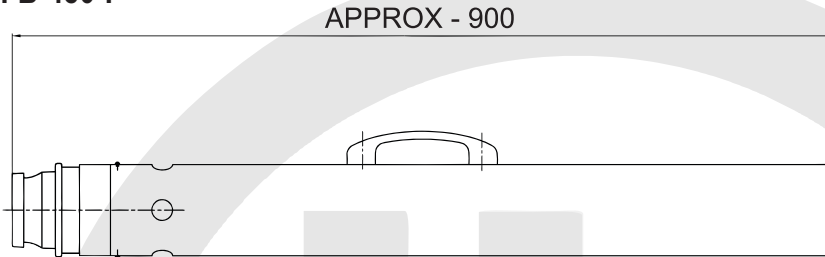

With its improvised range of Foam Equipments, NewAge introduces UL Listed Self Aspirating Low Expansion Foam Branches.

Manufactured out of Stainless Steel Grade 304, 316 and 316L, these offer superior corrosion resistance and offer proven robustness for any Fire Fighting Application in any demanding environment.

Suited to produce Foam with expansion ratio of 1:2 to 1:12 using premix Water-Foam Solution, these offer longer throws and superior cooling as compared to old designs

Fully compatible to NewAge UL Listed variable Inline Inductors and all the types of Foam Concentrate.

Available in the choice of 225 LPM or 450 LPM Flow Rate.

Isolation Valve optionally available. End connection are available in British Standard Instantaneous couplings, Storz Coupling, GOST Couplings, American NST, Threaded or Flanged Connections.

	FB-225-F	FB-450-F
Material of Construction	Stainless Steel 304, 316 & 316L	Stainless Steel 304, 316 & 316L
Flow Rate at 100 PSI	225	450
Expansion Ratio	2 to 12 Times	2 to 12 Times
Rated Working Pressure	100 PSI	100 PSI
Pressure Range	80 PSI to 200 PSI	80 PSI to 200 PSI
Length	750 MM	900 MM
Width	90 MM	75 MM
Height	125 MM	130 MM
Approvals	UL Listed	UL Listed

Address : "NKB House", P. O. Box No.: 14, Mehta Market, Surendranagar - 363 001, Gujarat, India

Phone No. : +91 2752 288000, +91 99250 63730 | **Fax :** +91 11 66173355 |

Website: www.newage-india.in | **Email :** nffcl@newage-india.in